

TRIMLESS ZIO-TZ*2 2X40W TZ2-40



- Luminaire Shape
- Frame Color

- Die cast Aluminium Body
- IP44 Rated
- IP20 Rated Control gear
- 50000 Hrs Lifetime


TRIMLESS ZIO-TZ*2 Trimless Gimbal is a versatile recessed spot light that can be used widely in indoors, easy to mount on the ceiling recess. The luminaire offering a broad range of power, color temperatures and options like motion detection, timer, sleep and twilight function.

This range of products are popular for a wide range of application such as Retail Show rooms, Galleries, Exhibition Halls, Shopping Malls and other indoor spaces.

Luminaire Details:

Product Name	: Trimless Zio –TRZ*2
Product Type	: LED Recessed Trimless Gimbal Light
Product code	: TZ2-40
Efficiency Classification	: Class B
Luminaire Type	: COB
Fixture Type	: Adjustable

Correlated Color Temperature:

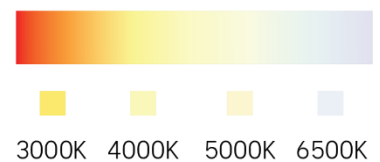

Light Source Details:

Light Emission	: Spot Emission
Source brand	: Cree
Rated Power	: 40W
CRI	: >80
UGR	: <19
McAdam Binning	: Step 3

CCT	Rated Lumens
 3000K	3720 lms
 4000K	3800 lms
 5000K	4000 lms
 6500K	4200 lms

Luminaire Housing:

Body	: Die cast Aluminium
Reflector type	: Aluminum Reflector
Lens/Diffuser	: Glass Diffuser
Storage Temperature (Ts)	: -40 to 60°C
Ambient Temperature (Ta)	: -20 to 50°C
Humidity	: RH 10-90 %

5 Years Product Warranty

Control Gear Specifications:

Control Gear Brand	: Hansa Green/Tridonic
Input Voltage	: 220-240V AC
Input Current	: 0.160A
Frequency	: 50/60Hz
Output Voltage	: 25-55 V DC Max.
Output Current	: 1050 mA
Max. Output power	: 60W
Power Factor	: >0.9
THD	: <15%
Case temperature(Tc)	: 80°C
Ambient Temperature	: -20 to 60 C
Over voltage protection	: Available
Short circuit Protection	: Available
No-Load Protection	: Available
Burst Protection Voltage	: 1KV
Surge Protection Voltage	: 1KV(L to N) & 2KV(L/N to Earth)

Control Gear Compatibility:

Control Gear is the driving unit of LED. Timless Zio Trimless Gimbal is compatible with Phase cut dimming, 0-10/1-10V dimming and DALI Dimming control gears.



Optics and Beam Angle:

24°, 60° Optics

Add-on sensor Compatibility:





Timless Zio Trimeless Gimbal is compatible with external add-on motion detection and daylight sensors.

Emergency Compatibility:


Timless Zio Trimeless Gimbal is compatible with emergency kits

Photometric Details:

Photometric testing provides a comprehensive laboratory service for testing the amount, colour, quality and spatial distribution of light emitted from lamps, LEDs and luminaires. The standard photometric data files in IES (.ies) and EULUMDAT (.ldt) formats per IES LM 79-08 and BS EN 13032

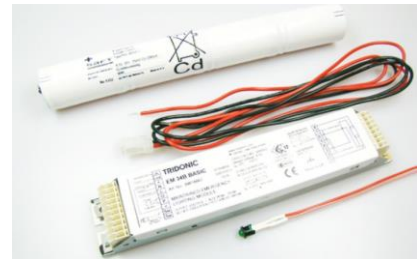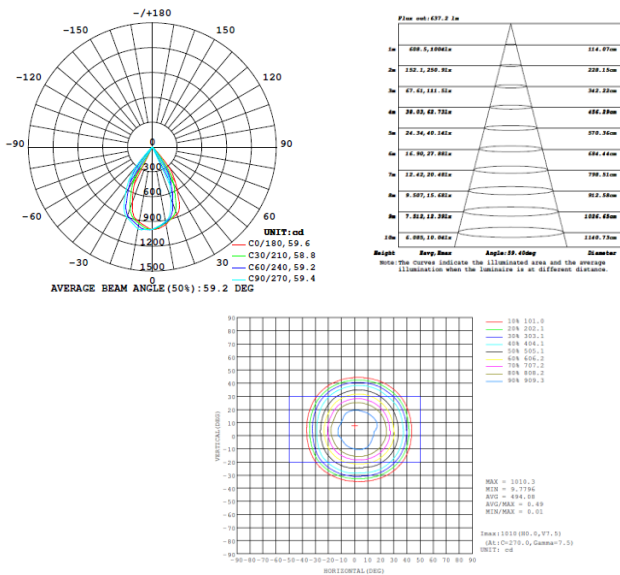

Physical Dimensions:



Length : 360X175 mm
Height : 175 mm

Ordering Codes

CCT	Code
3000K	629105040521
4000K	629105040541
5000K	629105040561
6500K	629105040591